


PLAN VIEW

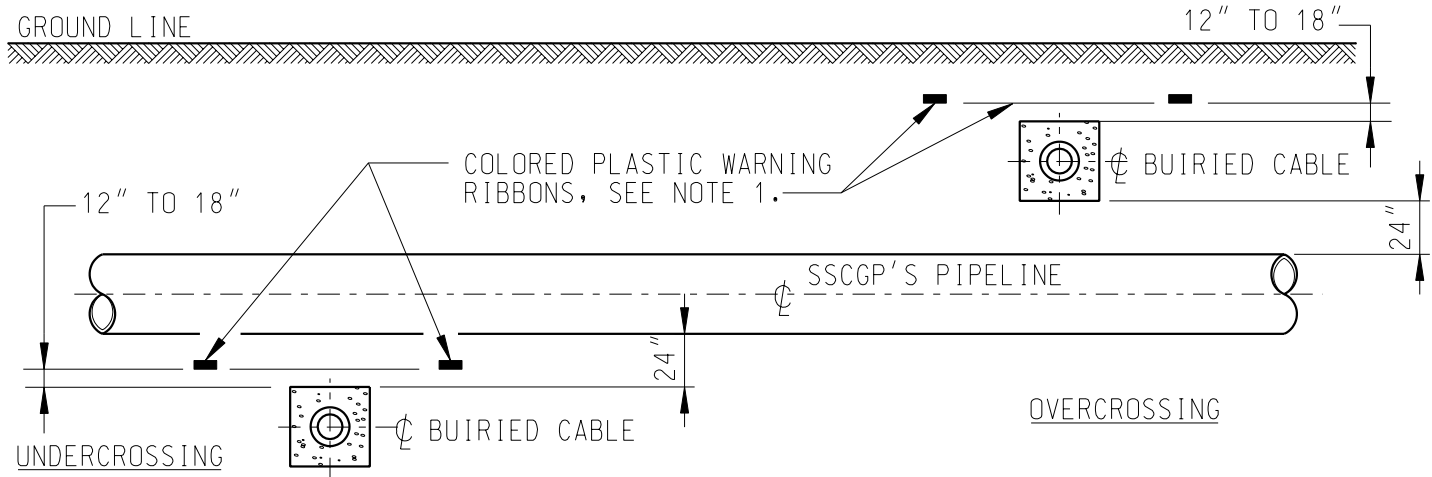

ELEVATION - CROSSING INSTALLATION

NOTES:

1. DURING BACKFILL OPERATIONS, A SAFETY RED PLASTIC RIBBON SHALL BE LAID 12" TO 18" ABOVE THE UNDERGROUND CABLE IN BOTH SIDES OF THE DITCH THE ENTIRE WIDTH OF SSCGP'S RIGHT OF WAY.
2. ABOVE GROUND ELECTRICAL OR FIBER OPTIC LOCATION MARKER WILL BE INSTALLED AT EACH END OF RED CONCRETE.



**STANDARD ENCROACHMENT DETAILS
FOR INSTALLATION OF ELECTRICAL OR FIBER OPTIC CABLE
CROSSING SSCGP'S PIPELINE**

REV.	DATE	BY	DESCRIPTION	APP	SCALE: 1" = 1'-0"
0	05-14-2004	GLS	COMBINED 005-090-0068 AND 0069	RDH	P. I. N.
1	11-05-2007	JAK	REPLACES STD. DWG. 005-090-A-0143	RDH	DWG. NO.
					STD-ENC-X-EC

DRAWN BY: GLS DATE: 05-04-2004
 CHECKED BY: DATE:
 APPROVED BY: RDH DATE: 05-28-2004